



Heavy Duty



Normal

safety and convenient




**Human Design**  
Safety Detector (Prevent Human Injury)



**Thunder & Water Resistance**  
Reliable & Powerful



**Screw Driven**

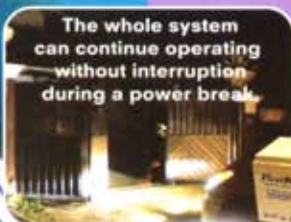

The whole system  
can continue operating  
without interruption  
during a power break.

**Backup Battery**  
(last for 48 hour)

make a  
happy family

## Choice

Ideal for swing gate and folding gate (Residential & Industrial)

## Reliable

Maximum strength, structural resistance and protection against severe weather conditions

## Quality

Selected materials and perfect coupling among the various parts

## Safety


Detection of unforeseen events and prevention of obstacles

## Simplicity

Easy installation and maintenance



### Wiring Diagram

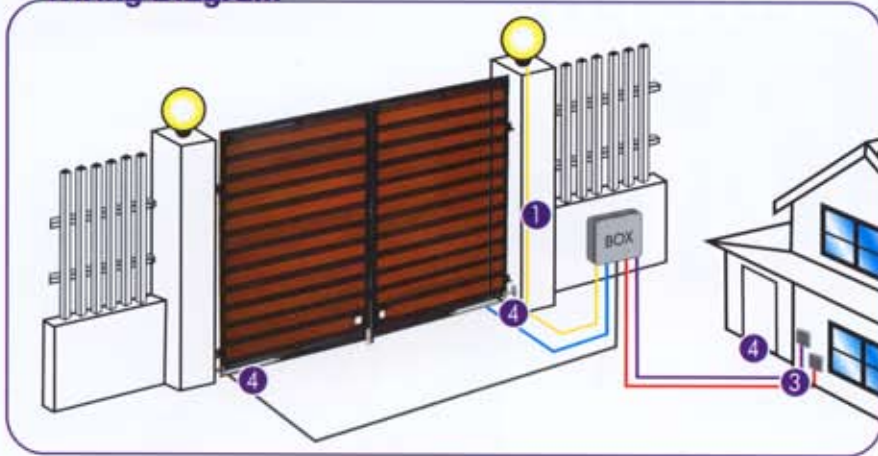

### Particulars


			Wire	Type					
	Control Panel		Receiver		Transformer		Battery		Allan Key
	Power Supply AC 230V		3	2.5 mm					
	Indoor Push Button		4	1.5 mm					
	Motor (A)		4	1.5 mm					
	Motor (B)		4	1.5 mm					
	Pillar Light (Optional)		1	1.5 mm					

### Technical Specification



Power Supply	AC 230V	Remote Control	2 Channels (UHF)
Motor Voltage Rating	DC 12V	Battery Type	12V 7AH
Motor Speed	6000 RPM	Remote Control Range	~ 30 meter
Open/Close Speed (90 Angle)	12 sec - 18 sec	Product Warranty	1 Year Warranty
Max. Leaf Opening Angle	110 degree	Standby Operation By Battery	48 Hours
Arm Body	Stainless Steel / Aluminium		

### Installation Dimensions

#### Close

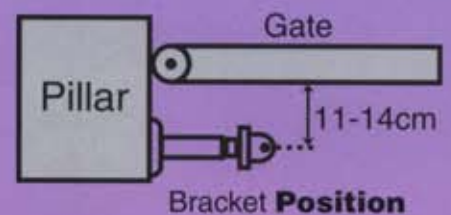

#### Open 90°

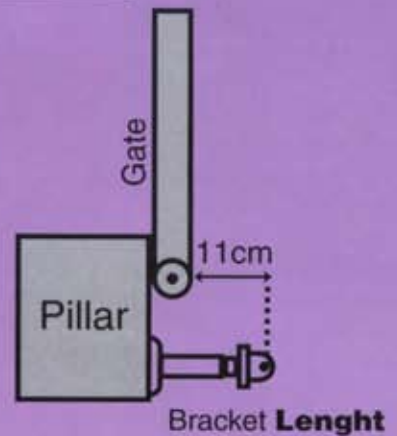

Arm Length Ending